



The 0661 keyswitch offers high reliability at an economical price. Maintained contact providing 1 x normally open & 1 x normally closed circuit. Key is removable in BOTH positions. As standard products are flush mount complete with 2 keys, screws and galvanised steel backbox. All products are packaged in recyclable boxes.

The keyswitches are keyed alike as standard. Key to differ are also available.

Legends are laser etched, providing permanent and clear text.

### ELECTRICAL SPECIFICATIONS

Please note the following specifications relate to supply of a keyswitch barrel only. Wiring, earthing and mounting considerations are the responsibility of the customer.

**Dielectric Strength:** 1KV RMS 2 Min @ Sea level (contact to contact)  
1,500V RMS 2 Min Case to contacts


**Insulation Resistance:** <500M-Ohms typ.

**Life:** 10,000 Make and break cycles

**Contact Rating:** 4A 125 Vac / 28Vdc

**Circuit Code:** Available in single pole and double pole

**Indexing:** 90°

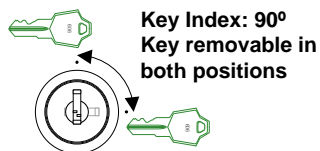

### MATERIALS

**Lock:** Bright Nickel plated alloy

**Tumbler Mechanism:** 4 Disc tumbler cylinder


**Keys:** Nickel plated brass with key number

**Contacts / Terminals:** Silver plated / Brass

### OPTIONS

- LED Indicators (12,24,12/24Vdc)
- Custom legends
- Surface mount housings
- Tamper proof fixings
- Custom panels

### DIMENSIONS (mm)

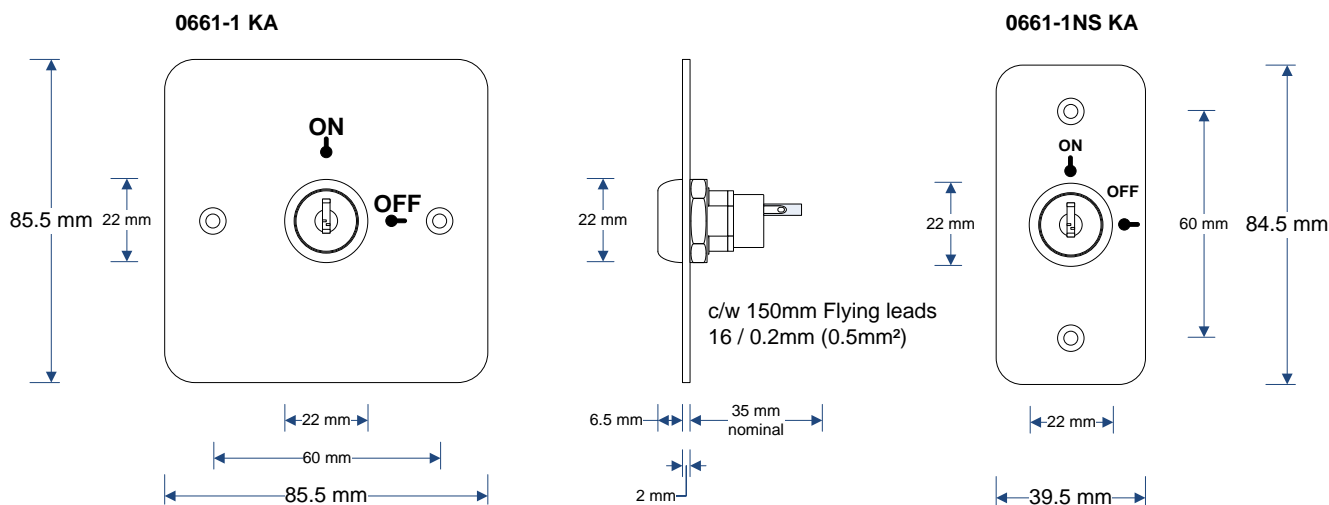

### Ordering Information

Product ref:	Description:
3E0661-1-KA	Maintained keyswitch, 1 gang, SSS, laser etched ON / OFF, 2 keys (606)
3E0661-1NS-KA	Maintained keyswitch, NS, SSS, laser etched ON / OFF, 2 keys (606)
3E0661-K-606	Spare key, Key No.606