

Features

- Range of backsets available
- Range of faceplate finishes
- Locks accept standard 17mm Europrofile cylinders and thumbturns

Functionality

Deadlatches offer flexible control of situations and can be used in conjunction with electric strikes to provide the added option of remote access control. Designed to operate on doors with 3mm door gaps.

| Code | Description | For use with | Finish |
|-----------------|---|--------------|--------|
| 5245701 | Deadlatch to suit 17mm Europrofile cylinder 25mm backset (RH) | | N/A |
| 5245702 | Deadlatch to suit 17mm Europrofile cylinder 25mm backset (LH) | | N/A |
| 5245703 | Deadlatch to suit 17mm Europrofile cylinder 28mm backset (RH) | | N/A |
| 5245704 | Deadlatch to suit 17mm Europrofile cylinder 28mm backset (LH) | | N/A |
| 5245705 | Deadlatch to suit 17mm Europrofile cylinder 38mm backset (RH) | | N/A |
| 5245706 | Deadlatch to suit 17mm Europrofile cylinder 38mm backset (LH) | | N/A |
| 52FP4511 | Flat faceplate | 4510/4570 | SAA |
| 52FP4512 | Radius faceplate | 4510/4570 | SAA |
| 52FP4513 | Radius faceplate with weather strip | 4510/4570 | SAA |

For details of the faceplate variants available, contact the sales office for further information and product codes.


- Industry standard ANSI cut outs
- Europrofile or round mortise cylinder options
- Multiple backsets available
- Latch hold back facility
- Latches compatible for use with electric strikes
- Cam plugs non handed reversible in the field

Handing of doors for locks

The description of swinging door operation always viewed from the outside.

LH: Door hinges on left

RH: Door hinges on right

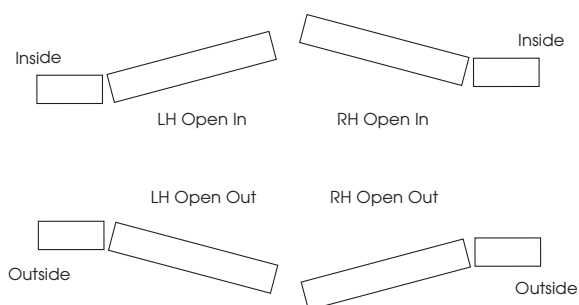


NB - For conversion table for lock backsets see page 18



524570 Lock Type

52FP4511 Faceplate

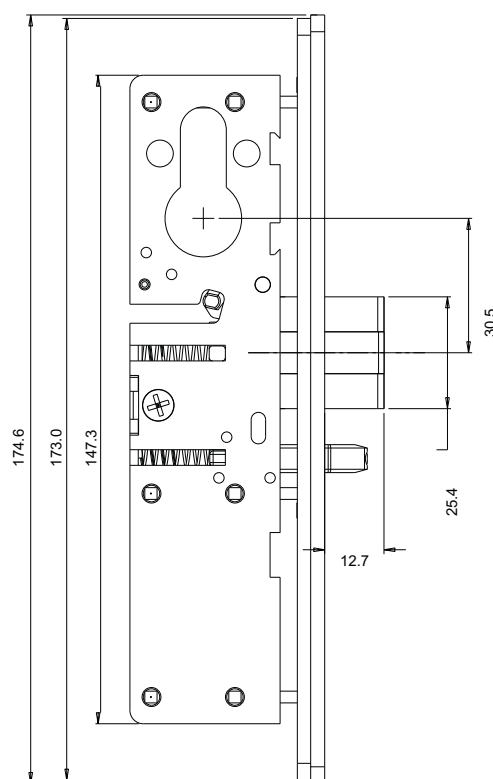

Features

- Range of backsets available
- Locks accept standard 1⁵/₃₂" mortise key or thumbturn cylinder
- Range of faceplate finishes

Functionality

Deadlatches offer flexible control of situations and can be used in conjunction with electric strikes to provide the added option of remote access control. Designed to operate on doors with 3mm door gaps, the deadlatches can also be operated with the 459 paddle handle (cam plug required).

| Code | Description | For use with | Finish |
|----------------------|--|--------------|--------|
| 5245101 | Deadlatch to suit round mortise cylinder 1 ¹ / ₈ " backset (RH) | | N/A |
| 5245102 | Deadlatch to suit round mortise cylinder 1 ¹ / ₈ " backset (LH) | | N/A |
| 5245103 | Deadlatch to suit round mortise cylinder 3 ¹ / ₃₂ " backset (RH) | | N/A |
| 5245104 | Deadlatch to suit round mortise cylinder 3 ¹ / ₃₂ " backset (LH) | | N/A |
| 52FP4511 | Flat faceplate | 4570/4510 | SAA |
| 52FP4512 | Radius faceplate | 4570/4510 | SAA |
| 52FP4513 | Radius faceplate with weather strip | 4570/4510 | SAA |
| 5245-FIX-KIT | Deadlatch fixing kit | 4570/4510 | N/A |
| 5245ESP | Extended strike plate | 4570/4510 | N/A |
| 465235 | Strike plate | | N/A |
| HP4560-EXT-RH | Extended cam - RH | | N/A |
| HP4560-EXT-LH | Extended cam - LH | | N/A |



524510 Lock Type

52FP4514 Faceplate

For details of the faceplate variants available, contact the sales office for further information and product codes.


- Industry standard ANSI cut outs
- Europrofile or round mortise cylinder options
- Multiple backsets available
- Latch hold back facility
- Latches compatible for use with electric strikes
- Cam plugs non handed reversible in the field

Handing of doors for locks

The description of swinging door operation always viewed from the outside.

LH: Door hinges on left

RH: Door hinges on right

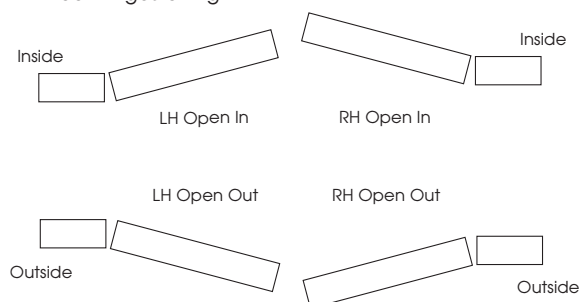

NB - For conversion table for lock backsets see page 18

